




Roofing systems and Rooftops Panels

From the Next Generation

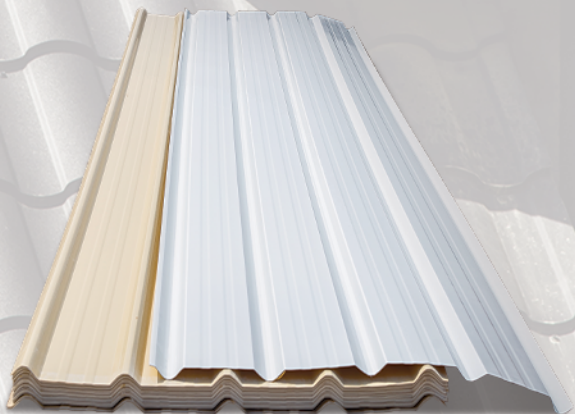


About the Factory


Asa line's industrial roof tiles are made from UPVC material and an ASA layer presenting a new look for the roofing systems of the new generation. We use the best raw materials imported from the USA, China, Turkey, and Germany, with Turkish expertise in manufacture.


At Asa-line, we aim to become the best producer of roofing panels in Egypt and the world. We believe that any success or growth we achieve stems from the importance we place on customer satisfaction and product quality.

ISO 9001 Certified



 **Factory Location :**
Egypt - Gamasa - Fourth Industrial Zone
Block "Z", Plot 4

 **Administrative and Sales Office:**
Damietta, Ras El-Bar, 77 Street,
Administrative Building of Ras El-Bar Stadium

 **057 2552116**

 **+20 100 931 5892**

 **+20 102 302 4244**

 **info@asa-line.com**


 **www.asa-line.com**



Product Features

- 10-Year Warranty:**
ASALINE tile panels come with a 10-year warranty against manufacturing defects, maintaining their properties and color quality for over a decade.
- Rust Resistant:**
The panels resist rust and corrosion from continuous exposure to weather conditions. They are not affected by natural factors like mold or fungi and do not react with salts, alkalis, or acids at concentrations up to 60%.
- Lightweight:**
ASALINE panels are lightweight, weighing only 4kg/m², making them easy to install and cost-effective.
- Fire Resistant:**
ASALINE tile panels are Class 18 fire-resistant and self-extinguishing.
- Sound and Electrical Insulation:**
These panels do not conduct electricity and provide superior sound insulation.
- Environmentally Friendly:**
ASALINE panels are produced without harmful substances and are fully recyclable.
- UV Resistant:**
The panels are unaffected by UV rays due to the use of Acrylonitrile Styrene Acrylate (ASA), which is used in automotive manufacturing for sun protection.
- Thermal Insulation:**
The panels maintain their properties within a temperature range of 40°C to 90°C, thanks to their multi-faceted polymer structure. They do not retain snow/ moisture for long periods.
- Waterproof:**
Naturally water resistant due to the PVC composition and feature a tight-sealing system to prevent water ingress.
- Easy to Clean:**
Easily cleaned with water and soap.

ASA line Tiles

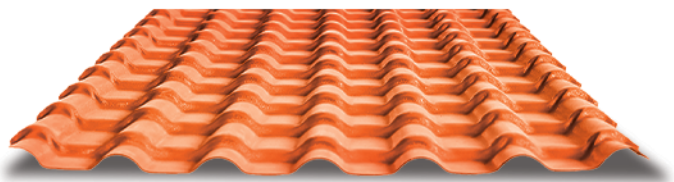


Accessories



polygonal gem Angular Gem Gem Cap

Technical Features

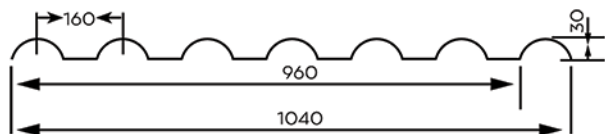


Product Lengths: 5.50m, 5.93 meter

Product Width: 1.04 meter

Number of Waves: 7 waves

Thickness: 2 mm, 2.50 mm, 3 mm

ASA Line Classic

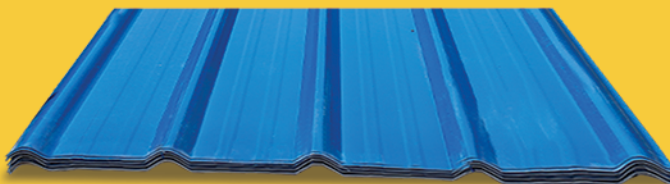


Accessories



Polygonal
gem

Technical Features

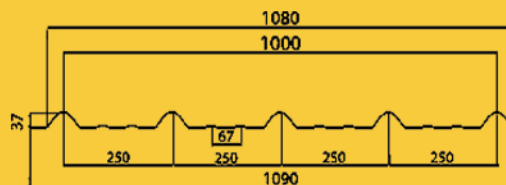


Product Length: 6 meter

Product Width: 1.09 meter

Number of Waves: 5 waves

Thickness: 2 mm, 2.50 mm, 3 mm

Colors

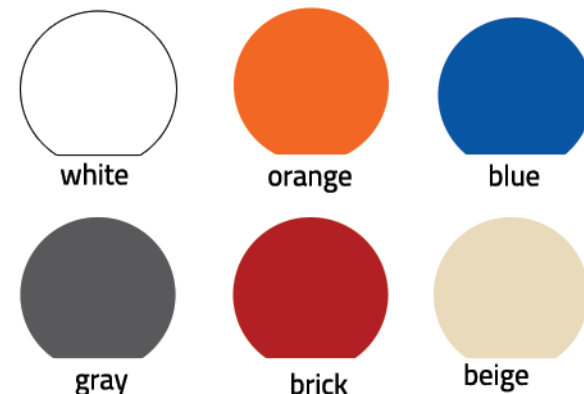

Applications

Residential Complexes

Wooden Roofs

Tourism Projects

Pergolas (Arbors)

Reinforced Concrete Buildings

Tourist Complexes

Steel Structure

Steel Structure

Warehouses and Factories

